



## Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	1732.5	2132.5	MHz
Bandwidth [BW]	fo±32.5 [ 1700.0 ~ 1765.0 ]	fo±32.5 [ 2100.0 ~ 2165.0 ]	MHz
Insertion Loss in BW	2.5	2.5	dB max.
Ripple in BW	0.7	0.7	dB max.
Return Loss in BW <input checked="" type="checkbox"/> ANT Port	18.0	18.0	dB min.
V S W R in BW <input type="checkbox"/> ALL Port			max.
Attenuation	50.0 dB min @ [ 2100.0 ~ 2165.0 ]	50.0 dB min @ [ 1700.0 ~ 1765.0 ]	MHz
<input checked="" type="checkbox"/> Absolute Value	20.0 dB min @ [ 1595.0 ~ ]	30.0 dB min @ [ 1995.0 ~ ]	MHz
<input type="checkbox"/> Relative Value	dB min @ [ ~ ]	dB min @ [ ~ ]	MHz
	dB min @ [ ~ ]	dB min @ [ ~ ]	MHz
Isolations		dB min @ [ ~ ]	MHz
		dB min @ [ ~ ]	MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

## Mechanical Specification

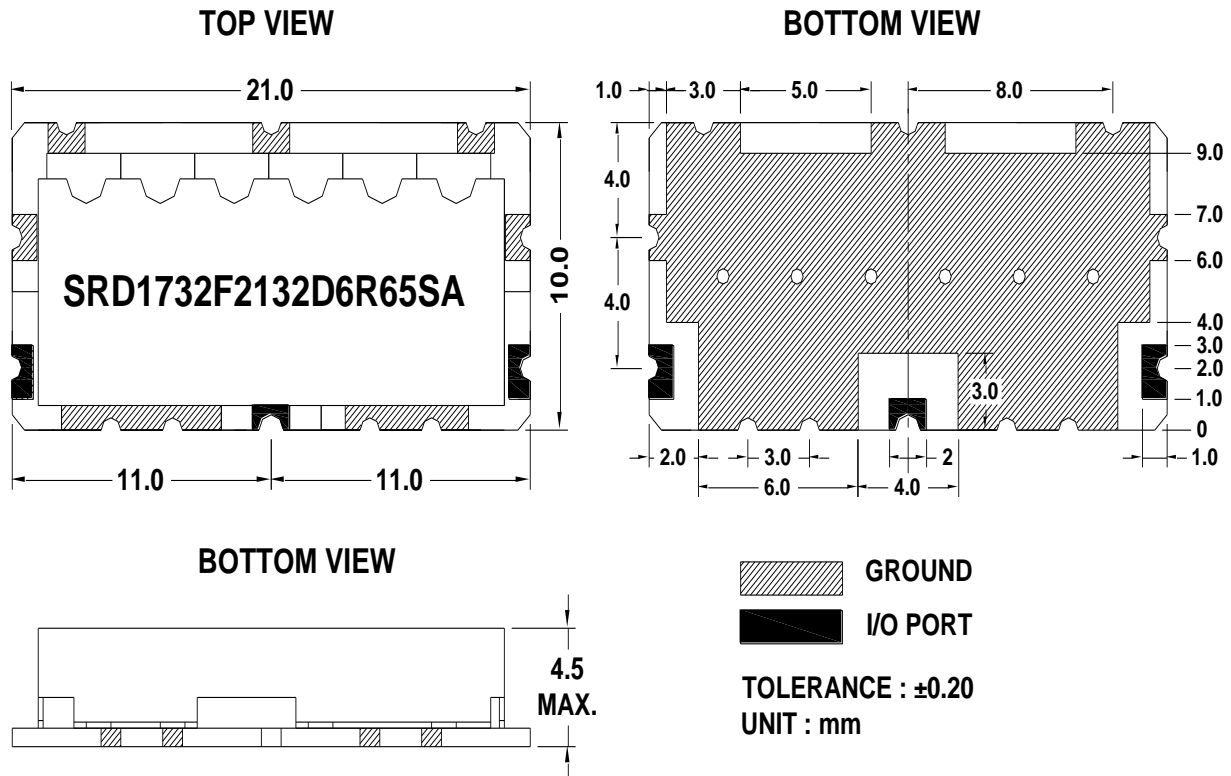

## Plot Data

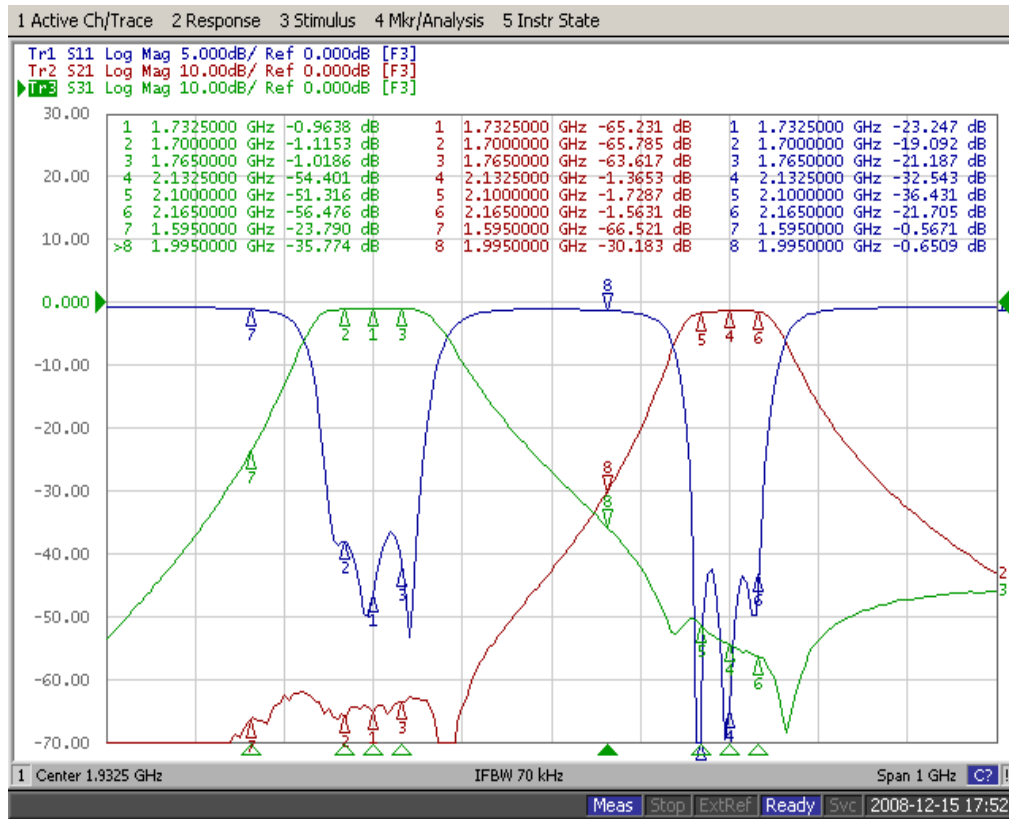

## Recommended PC Board Pattern

