



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	900.0	MHz
Bandwidth [BW]	$f_o \pm 15.0$ [885.0 ~ 915.0]	MHz
Insertion Loss in BW	2.6	dB max.
Ripple in BW	1.0	dB max.
Return Loss in BW		dB min.
V S W R in BW	2.0	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	35.0 dB min. @ $f_o \pm$ [800.0 ~ 1000.0]	MHz
	12.0 dB min. @ $f_o \pm$ [865.0 ~ 935.0]	MHz
	dB min. @ $f_o \pm$ [~]	MHz
	dB min. @ $f_o \pm$ [~]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

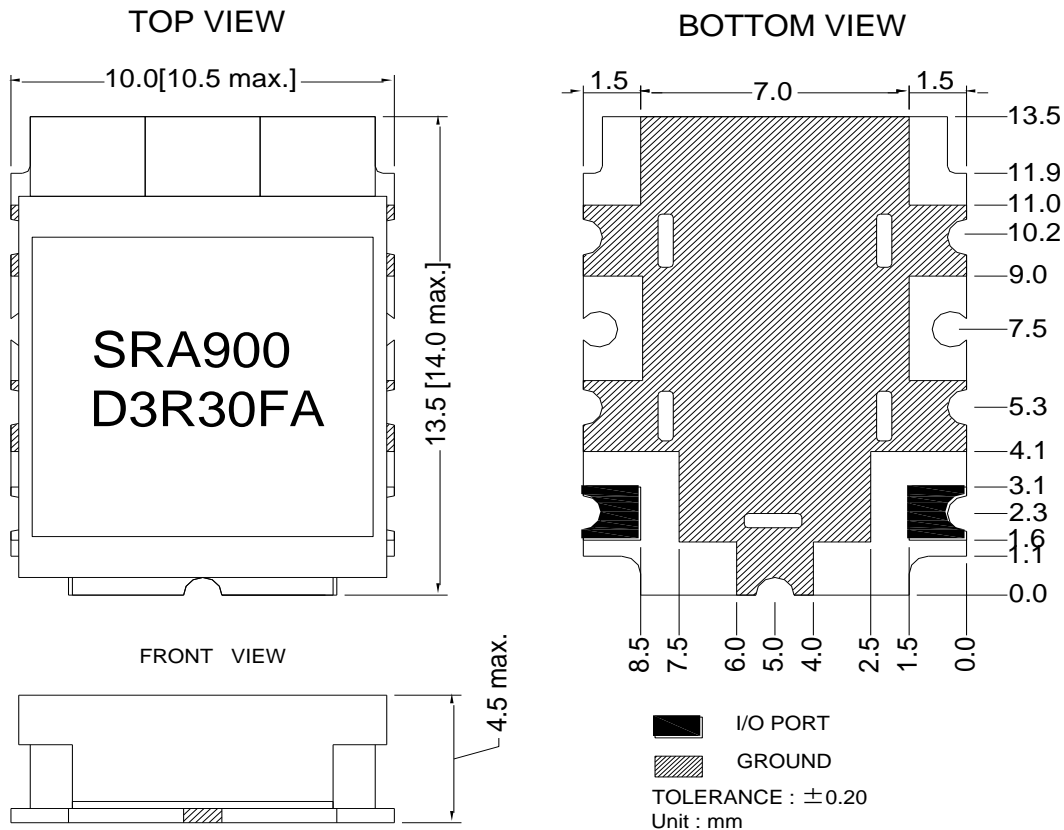

Plot Data

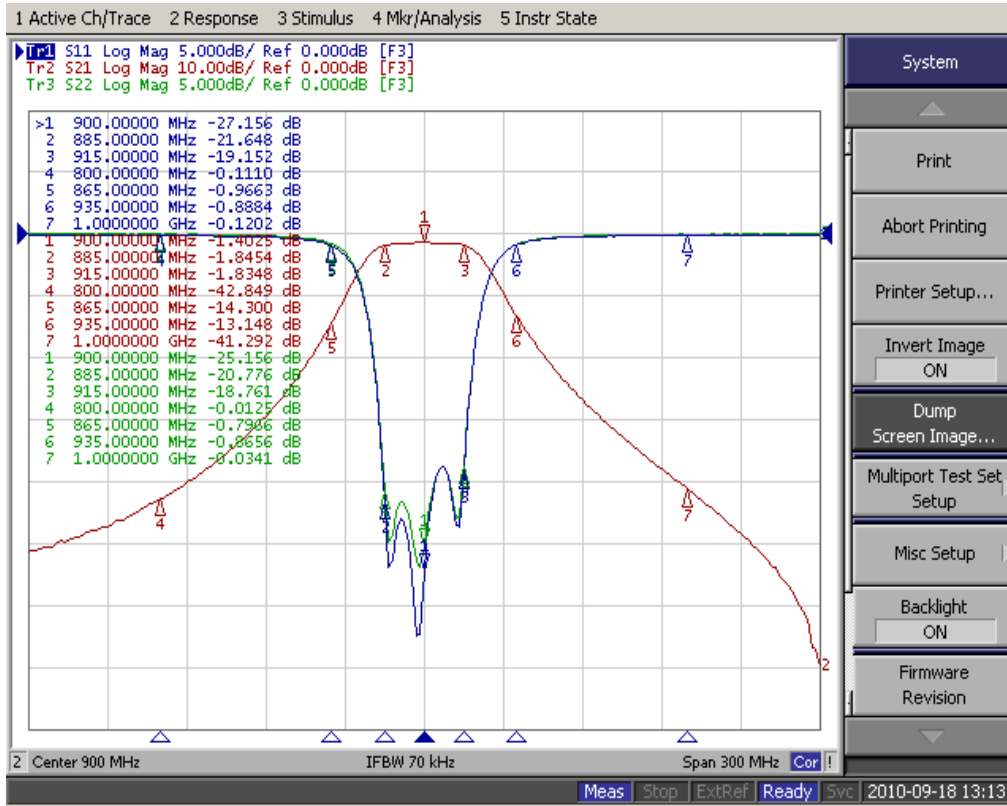

Recommended PC Board Pattern

